


DEP 19 MLED

Ceiling recessed luminaire, 2x11W / 4x11W LED




IP 44

**220-240V
AC/DC**

LED



Optional diffusers:



PD - prismatic



OD - opal

Type	Wattage	Light Source	Weight	Light flux	Equivalent
DEP 19-MLED220/211/...	2 x 11 W	LED	3,9 KG	2 x 1250 lm	2x18W (T8); 2x14W (T5)
DEP 19-MLED240/411/...	4 x 11 W	LED	4,2 KG	4 x 1250 lm	2x36W (T8); 2x28W (T5)

Application

Accommodation areas, passage ways, cabins, etc.

Approvals

According to the rules of relevant classification societies, additional IEC

Housing

zinc coated steel, powder painted white

Cover

Opal or prismatic diffuser

Cable entry

2 inlet, cable max \varnothing 20 mm

Mounting

4 mounting holes \varnothing 7mm or special bracket ordered separately

Electrical connection

See finish section

Type of ceiling

I strip ceiling - produced by FAMOS

II panel ceiling - produced by FAMOS, LUBMOR

III tile ceiling - produced by FAMOS, LUBMO

3.18

OPTIONS

110-240V
AC/DC

Battery Backup System
3h

Dimmable

Stainless Steel




Plug and Socket


Different Diffuser

Red/White Filter

Red Filter

Antimagnetic

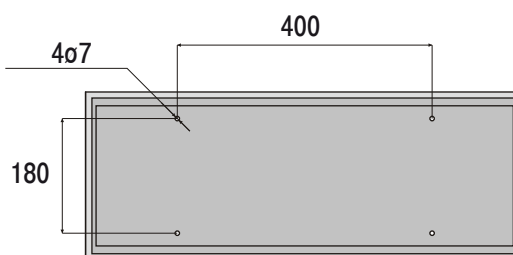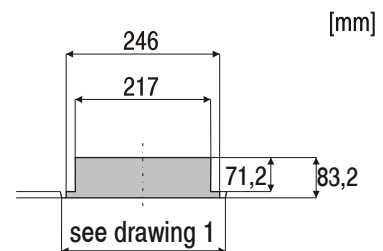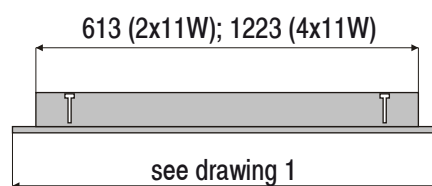




Ceiling recessed luminaire, 2x11W / 4x11W LED

DEP 19 MLED

Order Specification

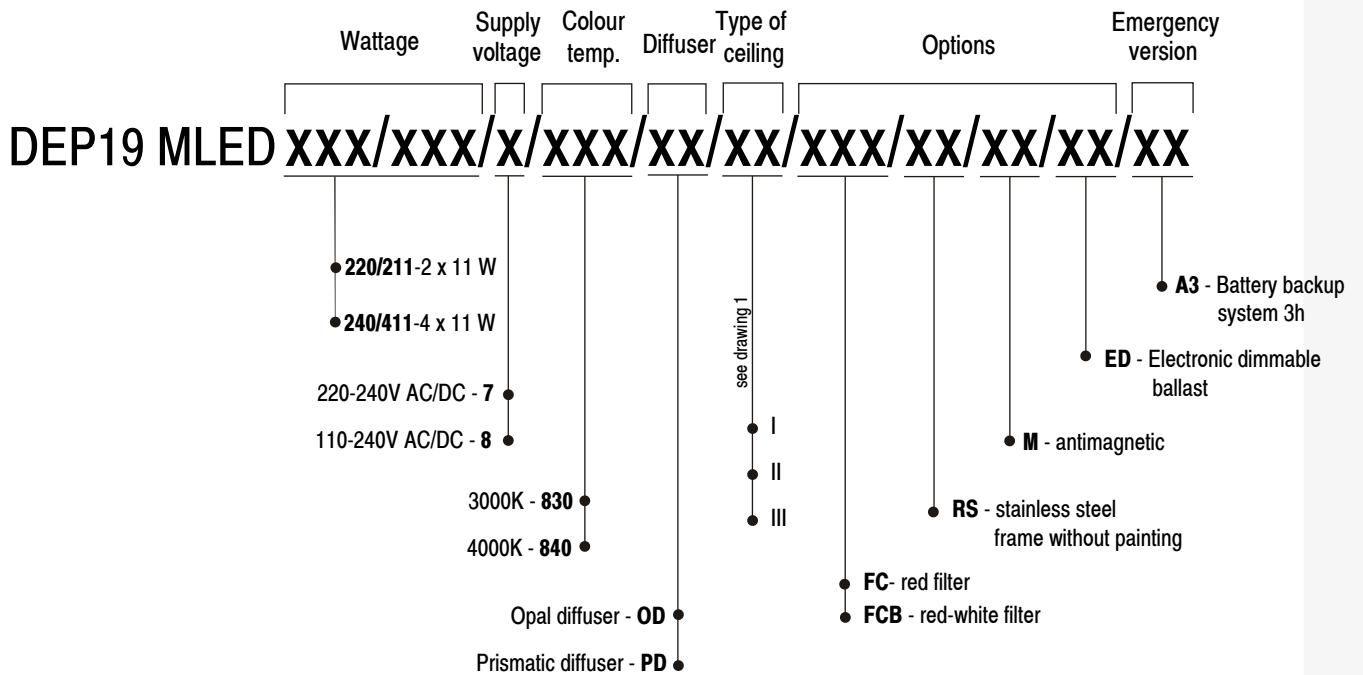

3.19

Example of type description

DEP 19 MLED 220/211/7/830/PD//A3 - light fitting with LED source 2x11W; suply voltage 220-240V AC/DC; colour temperature 3000K; prismatic diffuser; type of ceiling - I; emergency lighting 3h.

Additional equipment

31-319-9601 Special bracket type C /ordered separately/

