

Single Gas Detector



E1000 Portable Single Gas Detector

FEATURES


- Interchangeable smart sensor module
- Intrinsically safe
- Visual, audible and vibrative alarm
- Adjustable alarm levels and span calibration value
- STEL and TWA alarm for toxic gases
- Password management
- Real-time clock
- Self-test after power on
- Self-diagnostic and self-correction function

APPLICATION

Steelworks, petrochemical plant, oil industry, shipbuilding yard, sewage treatment plant, mine, power supply works etc.

E1000 is a rechargeable single gas detector and is suitable for monitoring the gas concentration of flammable gas, O₂ and toxic gases in the environment. It measures a gas continuously and displays its concentration and raises an alarm when a risk occurs. By adopting smart sensor module, it's easy for replacement and maintenance by the user himself.

APPEARANCE

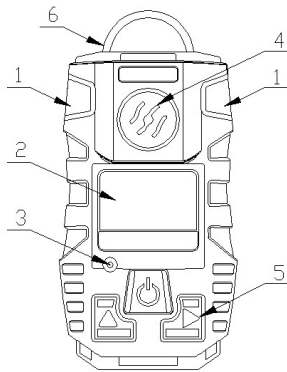

- | | |
|----------------|----------------|
| 1. Alarm light | 4. Sensor Port |
| 2. LCD Screen | 5. Button |
| 3. Buzzer port | 6. Buckle |

SPECIFICATIONS

Note: For detecting other gases, please refer to our gas list.

Measuring gas	O2	CO	H2S	Combustible	Event log	10000 events
Measuring range	0-25%VOL	0-500ppm	0-100ppm	0-100%LEL	Working temperature	Toxic gases: -20℃ ~ 50℃ Combustible: -40℃ ~ 70℃
Sensor type	Electrochemical			Catalytic		
Measuring type	Diffuse naturally				WorkinAg humidity	<95%RH (no condensation)
Response time	T ₉₀ <30s				Housing	Rubber enclosure
Display	LCD screen				Standard accessories	Operation manual, calibration cap, charger, screwdriver
Audible	≥80dB at 1m					
Alarm method	Visual, audible and vibrative signals				Optional function	Data upload through USB cable
Battery	DC3.7V 1800mAh Lithium battery				Dimension	108mm*61mm*36mm
Operating life	Toxic gases: ≥300h per charge				Weight	About 190g
	Combustible: ≥8h per charge				Ex grade	Ex ib IIC T4
Charging time	4-6h				Ingress protection	IP66