



**Av. Bruselas D36 - Pol. Ind. Cabezo Beaza
30353 – Cartagena (Murcia)
España / Spain
Tel.: +34 968 50 40 50 - Fax: +34 968 50 00 92
sumar-sl@sumar-sl.es
www.sumar-sl.es**

AVAILABLE MARINE DOORS



DOOR TYPE	PAGE
A-0	3
A-60	4
A-60	5
A-60	6
A-60	7
A-60	8
B-15	9
B-15	10
B-15	11
B-15	12
B-15	13
B-15 Frame & Sill Types	14 - 15
A-0 / A-60 Frame & Sill Types	16
MVS A-60 Sill Types	17

A-0**CHARACTERISTICS****A0 / A15 HINGED STANDARD**

DOOR LEAF: 1,0 mm galvanized steel with core of mineralwool (180kgs/m³)

OPTION DOORLEAF FINISH: Stainless steel, laminated, painted, pvc coated or offshore wet paint.

FRAME: 4,0 mm mild steel

OPTION FRAME FINISH: Stainless steel or powder epoxy coated (painted) or offshore wet paint.

HINGES: Three pcs of stainless steel

STRIKERPLATE: Stainless steel (1,0 mm)

SILL COVERPLATE: Stainless steel (option)(1,0 mm)

LOCKING: Assa Abloy, Schwepper, VingCard, Dorma.

MAX. CERTIFIED CLEAR OPENING: 1000 x 2050 mm (W x H)

OPTION: Window, Gastight

Reinforcement for holder and closer at upper and lower part of doorleaf.

A-60



CHARACTERISTICS

A60 HINGED WEATHER- / GASTIGHT

DOORLEAF (62 MM): 1,0 mm galvanized steel with core of mineralwool (250kgs/m³)

OPTION DOORLEAF FINISH: Stainless steel, painted or offshore wet paint.

FRAME: 4,0 mm mild steel (bolted or welded). Silicone gasket four sides.

OPTION FRAME FINISH: Stainless steel or powder epoxy coated (painted) or offshore wet paint.

HINGES: Three pcs of stainless steel

STRIKERPLATE: Stainless steel (1,0 mm). Adjustable.

SILL COVERPLATE: Stainless steel (option) (1,0 mm)

LOCKING: Assa Abloy, Schwepper, VingCard, Dorma.

MAX. CERTIFIED CLEAR OPENING: 1170 x 2000 mm (W x H)

OPTION: Window and hoseport

Reinforcement for holder and closer at upper and lower part of doorleaf.

A-60**CHARACTERISTICS****A60 HINGED GASTIGHT**

DOORLEAF (62 MM): 1,0 mm galvanized steel with core of mineralwool (250kgs/m³)

OPTION DOORLEAF FINISH: Stainless steel, laminated, painted, pvc coated or offshore wet paint.

FRAME: 4,0 mm steel (bolted or welded). Silicone gasket four sides.

OPTION FRAME FINISH: Stainless steel or powder epoxy coated (painted) or offshore wet paint.

HINGES: Three pcs of stainless steel with grease nipple.

STRIKERPLATE: Stainless steel (1,0 mm)

SILL COVERPLATE: Stainless steel (option) (1,0 mm)

LOCKING: Assa Abloy, Schwepper, VingCard, Dorma.

MAX. CERTIFIED CLEAR OPENING: 1170 x 2000 mm (W x H)

OPTION: Window and hoseport

Reinforcement for holder and closer at upper and lower part of doorleaf.

A-60

CHARACTERISTICS

A60 DOUBLE HINGED WEATHER- / GASTIGHT

DOORLEAF (62 MM): 1,0 mm galvanized steel with core of mineralwool (250kgs/m³)

OPTION DOORLEAF FINISH: Stainless steel, painted or offshore wet paint.

FRAME: 4,0 mm mild steel (bolted or welded). Silicone gasket four sides.

OPTION FRAME FINISH: Stainless steel or powder epoxy coated (painted) or offshore wet paint.

HINGES: Three pcs of stainless steel

STRIKERPLATE: Stainless steel (1,0 mm). Adjustable.

SILL COVERPLATE: Stainless steel (option) (1,0 mm)

LOCKING: Assa Abloy, Schwepper, VingCard, Dorma.

MAX. CERTIFIED CLEAR OPENING: 2300 x 2250 mm (W x H)

OPTION: Window

Reinforcement for holder and closer at upper and lower part of doorleaf.

A-60



CHARACTERISTICS

A60 DOUBLE HINGED GASTIGHT

DOORLEAF (62 MM): 1,0 mm galvanized steel with core of mineralwool (250kgs/m³)

OPTION DOORLEAF FINISH: Stainless steel, laminated, painted, pvc coated or offshore wet paint.

FRAME: 4,0 mm mild steel (bolted or welded). Silicone gasket four sides.

OPTION FRAME FINISH: Stainless steel or powder epoxy coated (painted) or offshore wet paint.

HINGES: Three pcs of stainless steel with grease nipple.

STRIKERPLATE: Stainless steel (1,0 mm)

SILL COVERPLATE: Stainless steel (option) (1,0 mm)

LOCKING: Assa Abloy, Schwepper, VingCard, Dorma.

MAX. CERTIFIED CLEAR OPENING: 2300 x 2250 mm (W x H)

OPTION: Window

Reinforcement for holder and closer at upper and lower part of doorleaf.

A-60**CHARACTERISTICS****A60 MANUALLY OPERATED SLIDING DOOR**

DOORLEAF (64 MM): 2 mm galvanized steel with core of ceramic fire insulation (96kgs/m³)

OPTION DOORLEAF FINISH: Stainless steel, powder epoxy coated, pvc coated or offshore wet paint.

FRAME: 4 mm mild steel (bolted or welded)

OPTION FRAME FINISH: Stainless steel, powder epoxy coated or offshore wet paint.

SLIDING SYSTEM: Tigra System in galvanized or stainless steel

STRIKERPLATE: Stainless steel (Option)

SILL COVERPLATE: Stainless steel (Option)

LOCKING: Schwepper, VingCard, Steinbach & Vollman, BKS

MAX. CERTIFIED CLEAR OPENING: 1878 x 1980 mm (W x H)

OPTION: Hoseport, electrical or pneumatic drive system.

B-15

CHARACTERISTICS

B15 HIGH SOUNDREDUCTION (44dB LAB VALUE)

DOORLEAF (53 MM): 1,5 mm galvanized steel with core of mineralwool (170kgs/m³)

OPTION DOORLEAF FINISH: Stainless steel, laminated, painted or pvc coated.

FRAME: 1,5 mm galvanized steel

OPTION FRAME FINISH: Stainless steel or powder epoxy coated (painted)

HINGES: Three pcs of stainless steel

STRIKERPLATE: Stainless steel (1,0 mm)

SILL COVERPLATE: Stainless steel (1,0 mm)

LOCKING: Assa Abloy, Schwepper, VingCard, Dorma.

MAX. CERTIFIED CLEAR OPENING: 1095 x 2077 mm (W x H)

OPTION: Window and kick-out panel

Reinforcement for holder and closer at upper and lower part of doorleaf.

B-15

CHARACTERISTICS

B15 WITH TOPMODULE (EXTENDED FRAME)

DOORLEAF (39 MM): 0,7 mm galvanized steel with core of mineralwool (150kgs/m³)

OPTION DOORLEAF FINISH: Stainless steel, laminated, painted or pvc coated.

FRAME: 1,5 mm galvanized steel

OPTION FRAME FINISH: Stainless steel or powder epoxy coated (painted)

HINGES: Three pcs of stainless steel

STRIKERPLATE: Stainless steel (1,0 mm)

SILL COVERPLATE: Stainless steel (1,0 mm)

LOCKING: Assa Abloy, Schwepper, VingCard, Dorma.

MAX. CERTIFIED CLEAR OPENING: 1000 x 2000 mm (W x H)

OPTION: Window, ventilation grill, hoseport and kick-out panel

Reinforcement for holder and closer at upper and lower part of doorleaf.

B-15**CHARACTERISTICS****B15 WITH BUILT-IN VENTILATION CHANNEL (37dB SOUNDREDUCTION)**

DOORLEAF (54 MM): 0,7 mm galvanized steel with core of mineralwool (180kgs/m³)

OPTION DOORLEAF FINISH: Stainless steel, laminated, painted or pvc coated.

FRAME: 1,5 mm galvanized steel

OPTION FRAME FINISH: Stainless steel or powder epoxy coated (painted)

HINGES: Three pcs of stainless steel

STRIKERPLATE: Stainless steel (1,0 mm)

SILL COVERPLATE: Stainless steel (1,0 mm)

LOCKING: Assa Abloy, Schwepper, VingCard, Dorma.

MAX. CERTIFIED CLEAR OPENING: 1000 x 2100 mm (W x H)

Reinforcement for holder and closer at upper and lower part of doorleaf.

B-15**CHARACTERISTICS****B15 STANDARD**

DOORLEAF: 0,7 mm galvanized steel with core of mineralwool (150kgs/m³)

OPTION DOORLEAF FINISH: Stainless steel, laminated, painted or pvc coated.

FRAME: 1,5 mm galvanized steel

OPTION FRAME FINISH: Stainless steel or painted

HINGES: Three pcs of stainless steel

STRIKERPLATE: Stainless steel (1,0 mm)

SILL COVERPLATE: Stainless steel (1,0 mm)

LOCKING: Assa Abloy, Schwepper, VingCard, Dorma.

MAX. CERTIFIED CLEAR OPENING: 1000 x 2000 mm (W x H)

OPTION: Kick-out panel, window, ventilation grill, hoseport etc.

Reinforcement for holder and closer at upper and lower part of doorleaf.

B-15

CHARACTERISTICS

B15 DOUBLE HIGH SOUNDREDUCTION (44dB LAB VALUE)

DOORLEAF (53 MM): 1,5 mm galvanized steel with core of mineralwool (170kgs/m³)

OPTION DOORLEAF FINISH: Stainless steel, laminated, painted or pvc coated.

FRAME: 1,5 mm galvanized steel

OPTION FRAME FINISH: Stainless steel or powder epoxy coated (painted)

HINGES: Three pcs of stainless steel

STRIKERPLATE: Stainless steel (1,0 mm)

SILL COVERPLATE: Stainless steel (1,0 mm)

LOCKING: Assa Abloy, Schwepper, VingCard, Dorma.


MAX. CERTIFIED CLEAR OPENING: 2000 x 2000 mm (W x H)

OPTION: Window and kick-out panel


Reinforcement for holder and closer at upper and lower part of doorleaf.

B-15 Frame Types

TOPFRAME

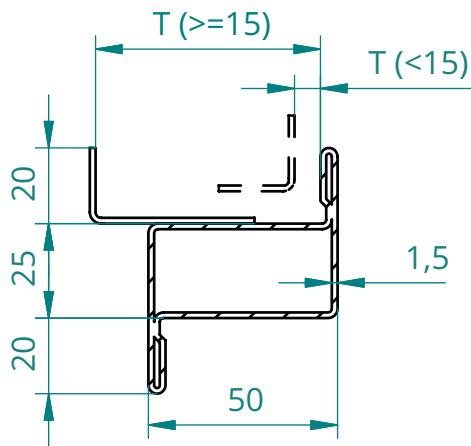


NORMAL TOP FRAME
type: T1

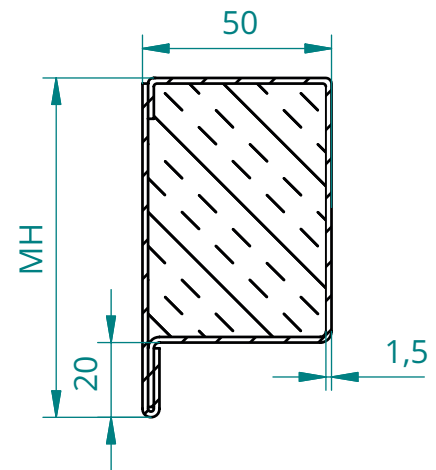


MODULE TOP FRAME
type: T2

SIDEFRAME

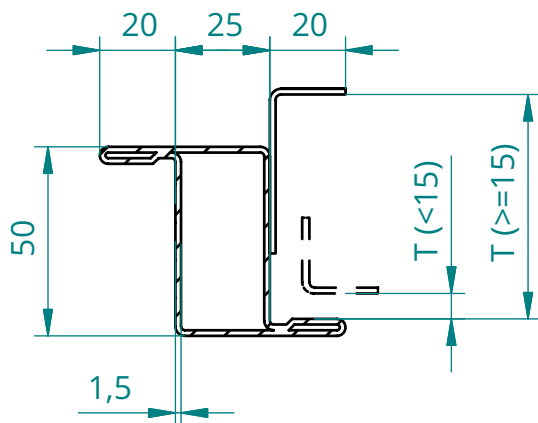

type: F1

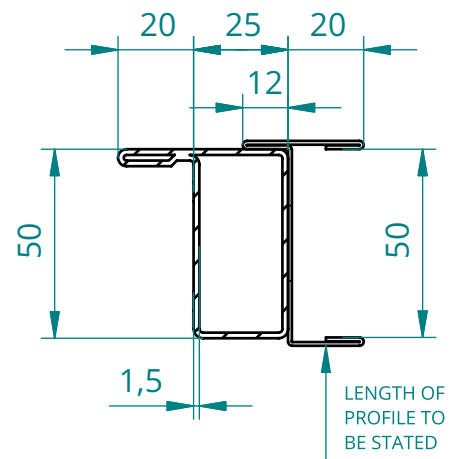






type: F2

T = WALL THICKNESS

SH = SILL HEIGHT

MH = HEIGHT OF MODULE TOP FRAME

B-15 Sill Types

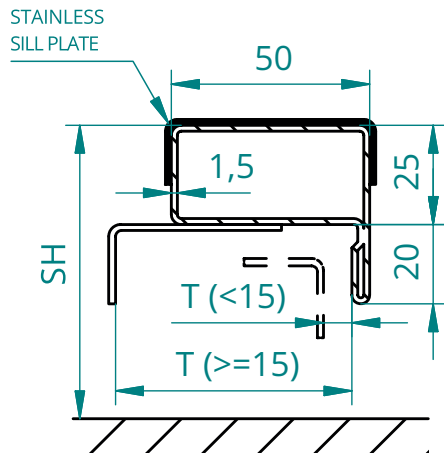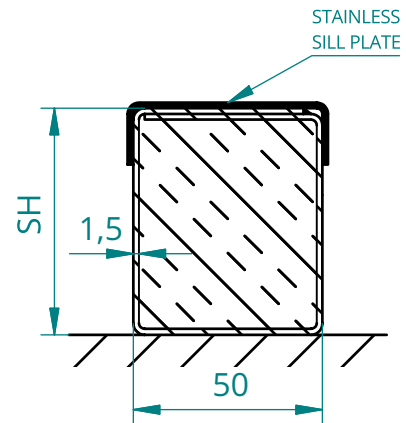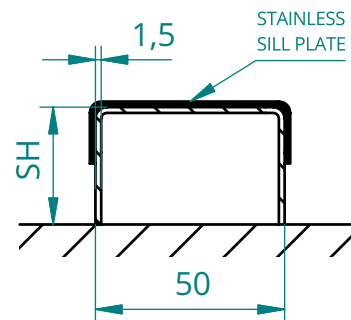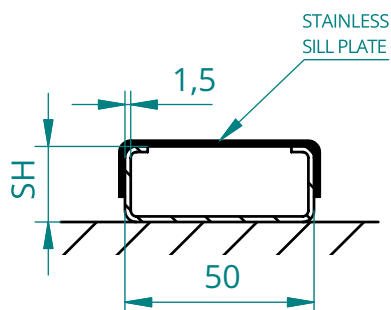
type: **S1**type: **S2**type: **S3**type: **S4**type: **S5**

T = WALL THICKNESS
SH = SILL HEIGHT
MH = HEIGHT OF MODULE TOP FRAME


A-0 / A-60

Frame & Sill Types

FRAME TYPES




NORMAL TOP AND SIDE FRAME
type: **F1**




TOP AND SIDE FRAME WITH GASKET
type: **F2***


SILL TYPES

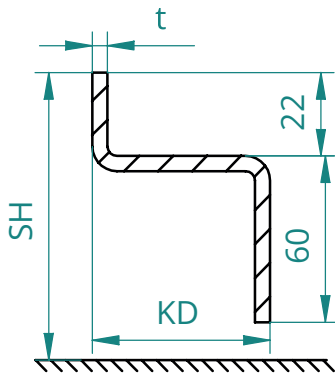


type: **S1**

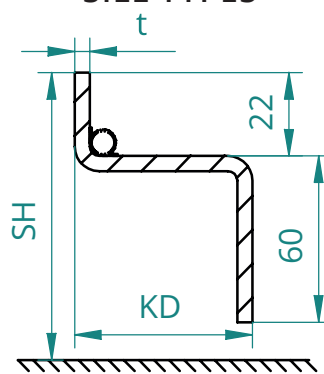

type: **S2**

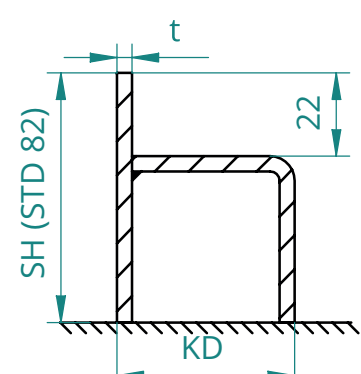


type: **S3**

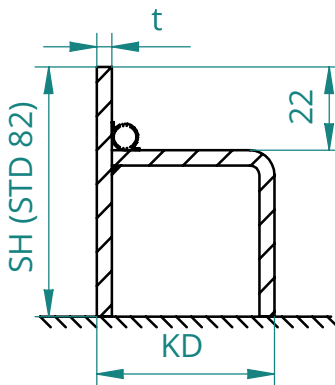


type: **S4**


KD** (MV 4298 N/G) = 45 mm
KD** (MV 4360/4361 N/G) = 70 mm
KD** (MV 4360/4361 W) = 60 mm




type: **S5**

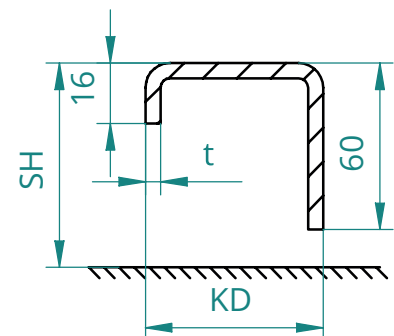

type: **S6**

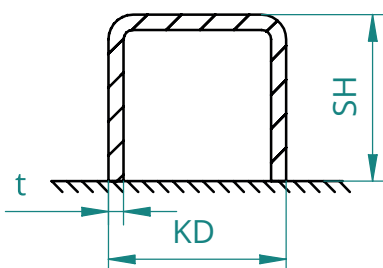

type: **S7**

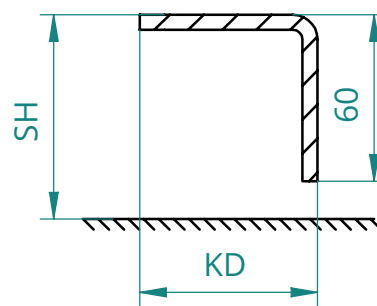


type: **S8**

KD (MV 4298 N/G) = 49 mm
KD (MV 4360/4361 N/G) = 73 mm
KD (MV 4360/4361 W) = 63 mm


*GASKET FOR GASTIGHT AND WEATHERTIGHT DOOR TYPES

MVS A-60 Sill Types


NORMAL SILL
type: **S10**

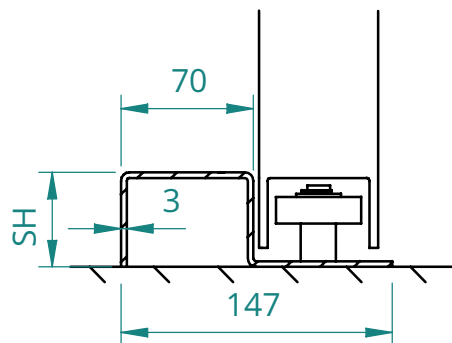

FLAT SILL
type: **S5**

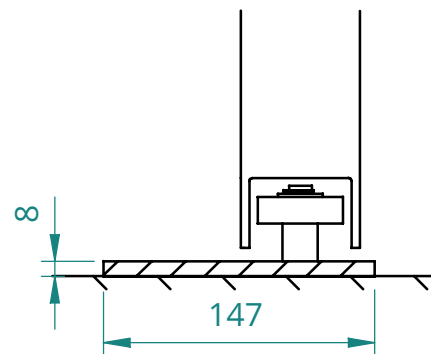

U SHAPED SILL
type: **S11**

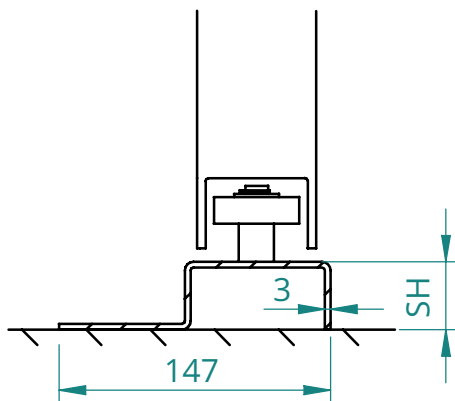

SH = SILL HEIGHT