


RLDL Series - LED Downlight 15Watt 1.500Lumens


LED downlight with reflector available for various interior- and technical applications such as accommodation, passengers area, bridge, corridor etc. Standard supplied with dimmable driver and WAGO connectors for easy installation.

100LM/W | IP44 | 100-305 Vac | 10-30 Vdc | EMG

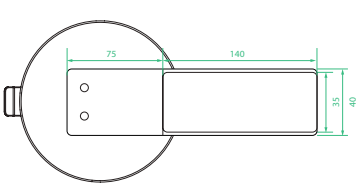

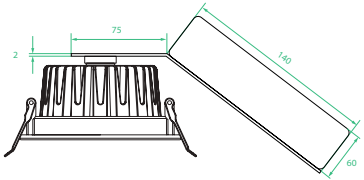



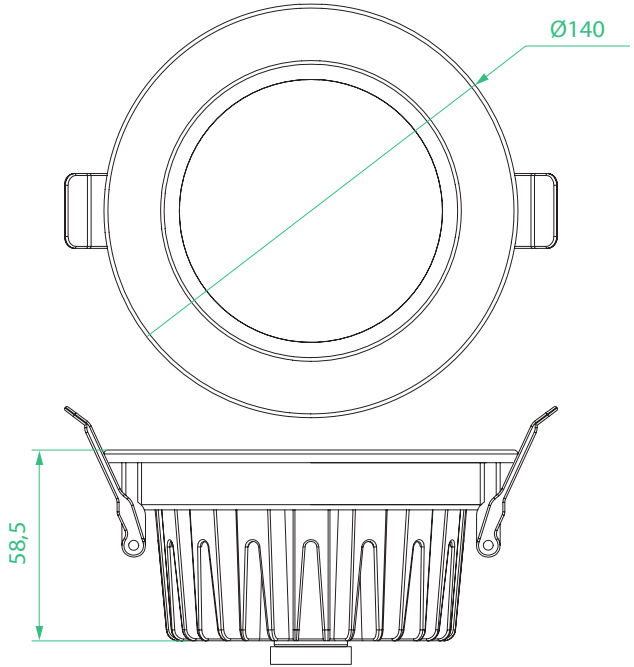

Cut out = 125 mm

Technical Information

Material:	Anodized aluminium housing and trim ring
Finish:	White Trim Ring- or Matt Black Trim Ring (optional colours on request *1)
Lens:	140°
IP Rating:	IP44
Light Source:	15Watt
	100Lumens per Watt
	3.000K Warm White or 3.900K Natural White
	Dual circuit available with white- or red light
	CRI > 85
Power Source:	100-305Vac 50-60Hz or 10-30Vdc
	Dimmable (0-10V - PWM -Resistance)
	Overload, over-voltage, over-temperature and short circuit protection
	10-30Vdc emergency circuit available
	3Hours battery emergency circuit available
Ambient Operating Temperature:	-30°C ~ +50°
Connection:	WAGO MIDI connectors
Mounting:	Heavy spring clips
Fixture weight:	0,7 kg





Compliances
In compliance with rules of maritime classification societies, additional VDE and IEC 60092-306.
(Equipment luminaires and lighting accessories for use on vessels)

Special Projects
We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended leadtimes will apply.

Product design and specifications are subject to change without notice.